




### Feature :

Compact size  
P.C.B terminal


### Application :

Consumer products  
Computer products  
Instrumentation  
Communication equipments  
Hand-held devices





SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T , P.C.B TYPE
CONTACT RATING	15 V DC , 0.6 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA, by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 100gf MAX.
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	2.5 ± 0.2 mm

### ▶ HOW TO ORDER

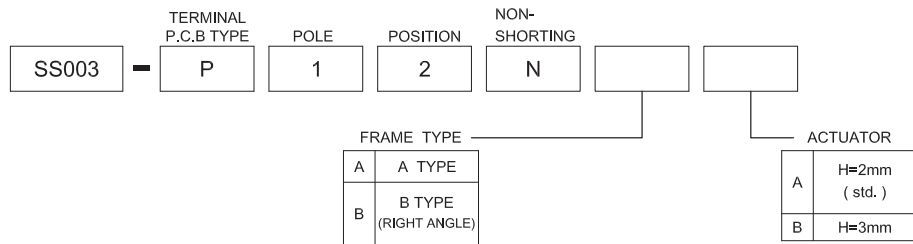


### ▶ DIMENSION

SS003-P12NAA



### ▶ CIRCUIT



SS003-P12NBB

