



TACT SWITCH

PUSH BUTTON SWITCH

LED TOUCH SENSOR SWITCH

5 DIRECTION NAVIGATION SWITCH WITH LED

MEMBRANE SWITCH

LED LIGHT BAR

SLIDE SWITCH

ROTARY SWITCH

ROCKER SWITCH

DETECT SWITCH

ENCODER

INTERRUPTER

MINIATURE MICRO SWITCH

TELEPHONE HOOK SWITCH

DOOR SWITCH

MINI SIZE SOCKET

KNOB

CAP SYMBOL

Feature :

- Illuminated LED and bi-color available
- Special thickness transparent cap
- Customer symbol available

Application :

- Audio device
- Video Controller




SWITCH SPECIFICATIONS	
POLE - POSITION	1P1T , with LED
CONTACT RATING	12 V DC , 100 mA
CONTACT RESISTANCE	200 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	50 MΩ MIN. 250 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	125 ± 50 gf
OPERATING LIFE	1,000,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.3 ± 0.1 mm


LED SPECIFICATIONS								
ATTENTION LEDs are Electrostatic Sensitive Devices (+) O (S) O (-)	Unit	Value / LED Color						
		Blue	Pure Green	Red	Yellow	Orange	Green	White
LUMINOUS INTENSITY@20mA I _v	mcd	/	/	85	/	/	140	/
Dominant Wavelength λ _D	nm	/	/	632	/	/	571	/
FORWARD VOLTAGE@20mA V _f	V	/	/	2.2	/	/	2.2	/

■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing


▶ HOW TO ORDER

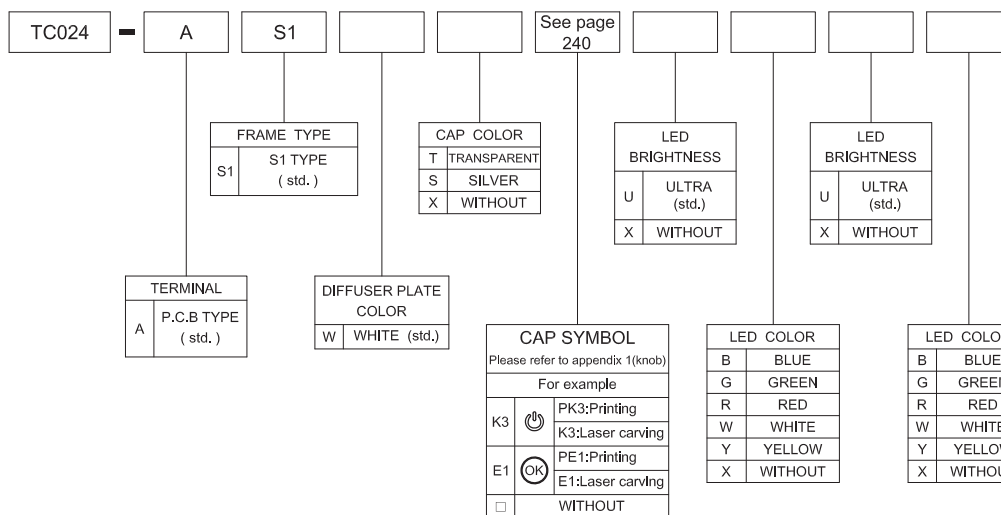

▶ DIMENSION

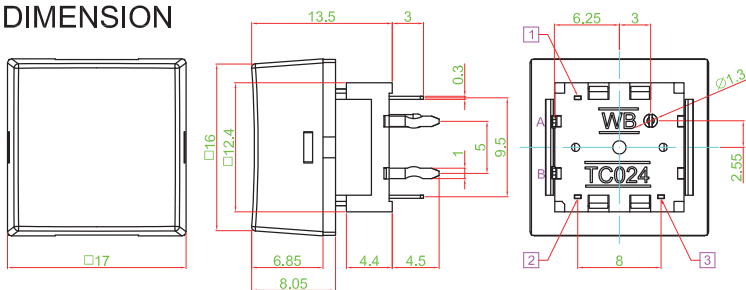

▶ CIRCUIT



▶ P.C.B. LAYOUT

